

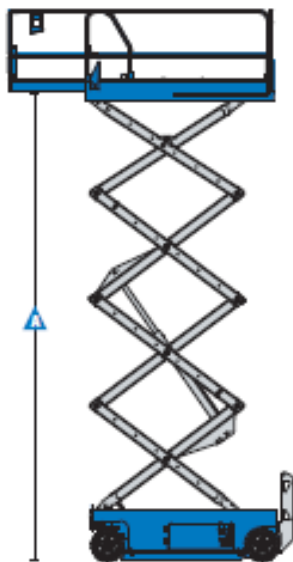




# Plateforme Elévatrice 10m Elec – GS-2632

## Fiche technique

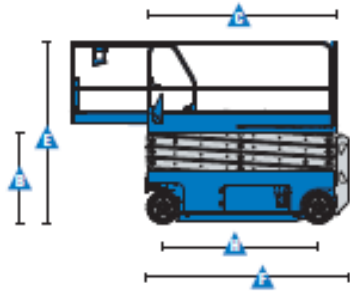

Models	GS-2032		GS-2632	
Measurements	US	Metric	US	Metric
Working height maximum*	26 ft	8.10 m	32 ft	9.92 m
▲ Platform height maximum	20 ft	6.10 m	26 ft	7.92 m
▲ Platform height stowed	3 ft 4.5 in	1.03 m	3 ft 9.5 in	1.16 m
▲ Platform length - outside	7 ft 5 in	2.26 m	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m	10 ft 5 in	3.18 m
Slide-out platform extension deck	3 ft	.91 m	3 ft	.91 m
▲ Platform width - outside	2 ft 8 in	.81 m	2 ft 8 in	.81 m
Guardrail height: fixed rails	3 ft 3 in	.99 m	—	—
fold down rails (CE)	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m
Toeboard height	6 in	.15 m	6 in	.15 m
▲ Height - stowed				
fixed rails	6 ft 8 in	2.03 m	—	—
folding guardrails (CE)	7 ft	2.13 m	7 ft 5 in	2.26 m
rails folded	5 ft 9 in	1.75 m	6 ft 3 in	1.91 m
▲ Length - stowed	8 ft	2.44 m	8 ft	2.44 m
Length - extended	10 ft 11 in	3.33 m	10 ft 11 in	3.33 m
▲ Width	2 ft 8 in	.81 m	2 ft 8 in	.81 m
▲ Wheelbase	6 ft 1 in	1.85 m	6 ft 1 in	1.85 m
▲ Ground clearance - center	3.5 in	.09 m	3.5 in	.09 m
▲ - with pothole guards deployed	.75 in	.02 m	.75 in	.02 m
<b>Productivity</b>				
Maximum platform occupancy**	2	2	2	2
Lift capacity	800 lbs	363 kg	500 lbs	227 kg
Extension deck capacity	250 lbs	113 kg	250 lbs	113 kg
Drive height	full height		full height	
Drive speed - stowed	2.2 mph	3.5 km/h	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability - stowed***	30%		25%	
Maximum outrigger leveling:				
front to back	—	—	—	—
Maximum outrigger leveling:				
side to side	—	—	—	—
Turning radius - inside	zero	zero	zero	zero
Turning radius - outside	7 ft	2.13 m	7 ft	2.13 m
Raise / lower speed	30 / 34 sec	30 / 34 sec	30 / 40 sec	30 / 40 sec
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm
<b>Power</b>				
Power source	24 V DC (four 6V 225 Ah batteries)		24 V DC (four 6V 225 Ah batteries)	
Hydraulic system capacity	3.75 gal	14.2 L	3.75 gal	14.2 L
<b>Weight****</b>				
ANSI, CSA	3,574 lbs	1,621 kg	4,413 lbs	2,002 kg
CE, AUS	4,024 lbs	1,825 kg	4,313 lbs	1,956 kg